

Fentrim® IS 20

HIGH PERFORMANCE ADHESIVE TAPE



INNOVATIVE, pre-folded tape for SEALING inside corners.

Fentrim IS 20 is the optimal solution for permanent airtight sealing of window frames and other right-angle connections on the building interior. As with all tapes in the Fentrim family, IS 20 is a completely primerless solution for all substrates – including masonry.

CHARACTERISTICS

AVAILABLE WIDTH(S)	2.9" / 3.9" / 5.9"
ROLL LENGTH	82'
WATER VAPOR TRANSMISSION	0.17 US PERMS
MINIMUM SURFACE CONTACT FOR MASONRY SUBSTRATE	2"

- ✓ immediate seal over entire surface area
- ✓ pre-folded at 5/8" with exposed adhesive surface
- ✓ protruding backing strip is tear-proof and easy to remove




INSTALLATION INSTRUCTIONS



- Cut full-length piece for window sill
- Bond first to window, then bridge to rough opening
- Maintain consistent 5/8" contact with window frame



- Repeat Step 1 for both jambs and head
- Overlap at the corners
- Press on firmly

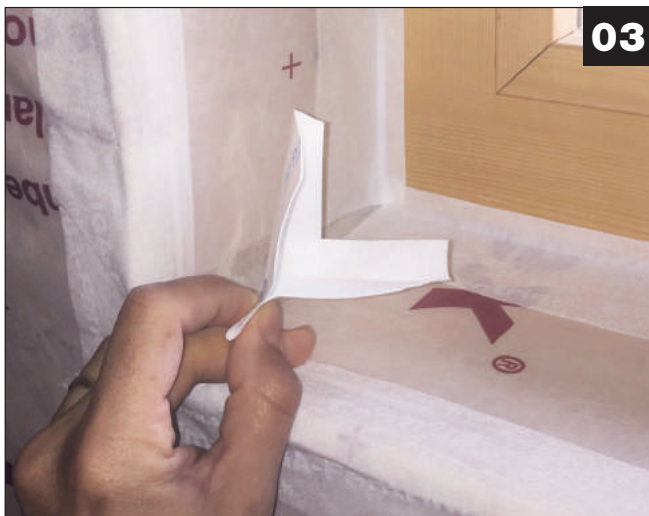

- To detail each corner, cut a short 3" piece
- Make a crosscut at the center of the narrow, 5/8" pre-folded section
- Crease the center of the wide section and bond the 2 crosscut parts together, forming the compound corner



- Insert into corner
- Press on firmly
- Repeat for all four corners

All SIGA products are backed by a 10 year limited warranty. Reference [siga.swiss](https://www.siga.swiss) for complete details.

We want you to maximize the performance potential of Fentrim IS 20 on your project. Contact one of our Application Advisors for assistance, from architectural details to jobsite training.