

Wigluv[®] black

high-performance adhesive tape for open joint cladding



Semi-permeable high-performance construction tape for open joint cladding

SIGA Wigluv black is a tenaciously sticky, low profile, acrylic sealing tape. Constructed of a special vapor-permeable polyolefin (PO) film, reinforcing mesh, and pressure sensitive glue, SIGA Wigluv black is used in combination with Majvest 700 SOB for open joint façades with up to 2 inch open joint size and a maximum open area of 40%.

CHARACTERISTICS

Roll dimension	2.4" x 131'
Thickness	14 mils
Water vapor transmission	1.7 US perms
Max UV exposure prior to cladding installation	12 months

- ✓ extremely UV-stable
- ✓ high adhesive strength at high and low temperatures
- ✓ semi-permeable (1.7 US perms) material allows damp substrates to dry out



INSTALLATION INSTRUCTIONS



- Use Wigluv black 60 to tape vertical overlaps of Majvest 700 SOB starting at the top




- Straighten tape and apply firm hand pressure while working downwards



- Ensure centered application at the overlap and roll tape out in manageable lengths



- Once tape is applied use a rubber roller or squeegee to press on and activate the acrylic adhesive

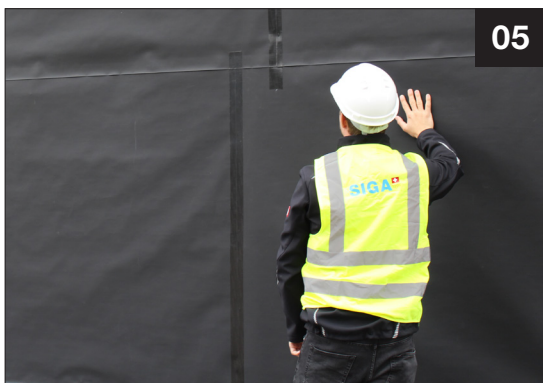

- How it should look

All SIGA products are backed by a 10-year limited warranty. Reference [siga.swiss](https://www.siga.swiss) for complete details. We want you to maximize the performance potential of Wigluv black on your project. Contact one of our Application Advisors for assistance, from architectural details to jobsite training.